



HITACHI/(OPTOELECTRONICS)


MAXIMUM SAFE OPERATION AREA

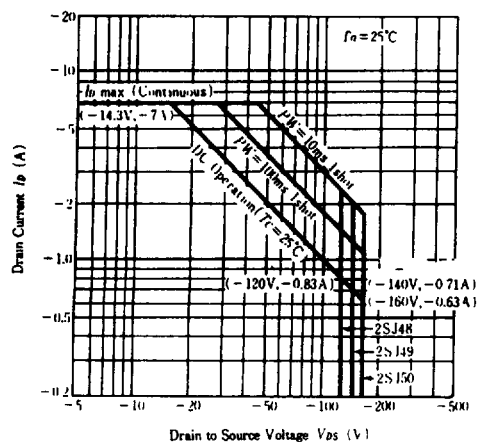


TYPICAL OUTPUT CHARACTERISTICS

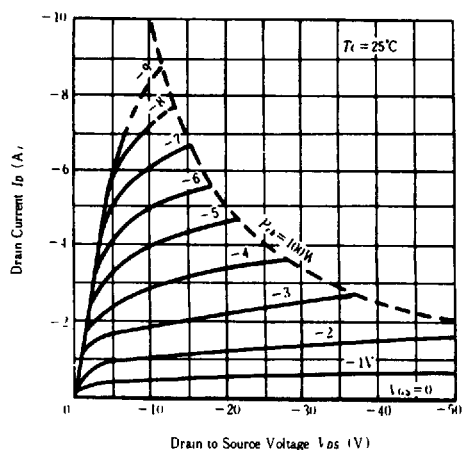


TYPICAL TRANSFER CHARACTERISTICS

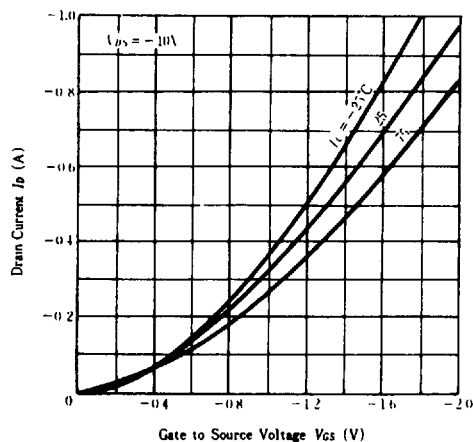


DRAIN TO SOURCE SATURATION VOLTAGE VS. DRAIN CURRENT

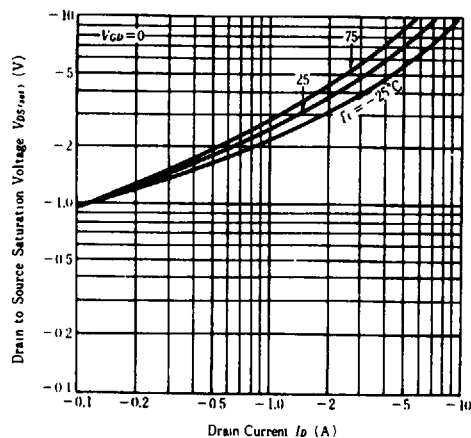


**DRAIN TO SOURCE VOLTAGE VS.
GATE TO SOURCE VOLTAGE**

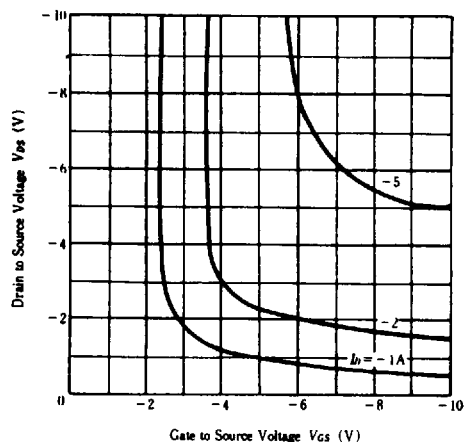


INPUT CAPACITANCE VS. GATE TO SOURCE VOLTAGE

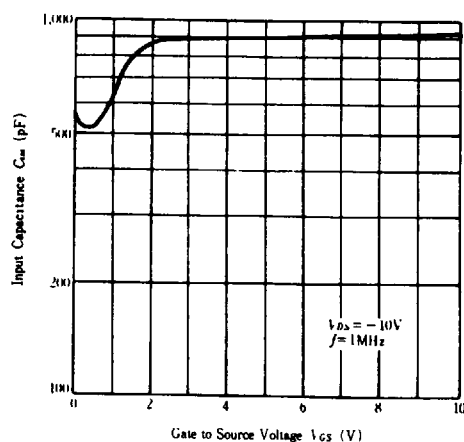


FORWARD TRANSFER ADMITTANCE VS. FREQUENCY

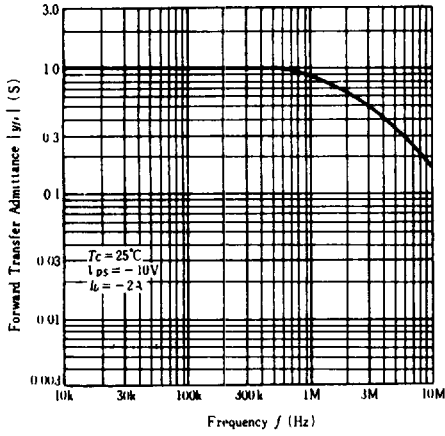

SWITCHING TIME VS. DRAIN CURRENT

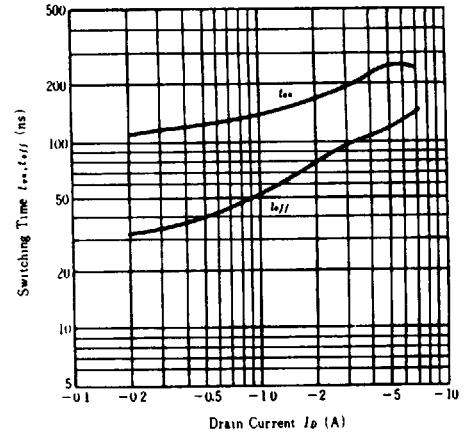

SWITCHING TIME TEST CIRCUIT

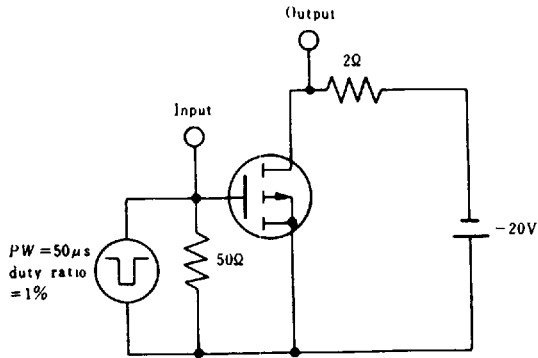

WAVEFORMS

